

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D. C. 202311105 U.S. PTO  
08/055387  
05/13/97

Transmitted herewith for filing is the patent application of

Inventor(s): Hugh G. Chilton and William L. ZehnpfennigFor: DEPTH MEDIA IN-TANK FUEL FILTER WITH EXTRUDED MESH SHELL

Enclosed are:

☒ 3 sheet(s) of drawing(s).☒ An Assignment of the invention to KUSS CORPORATION.☐ A certified copy of a \_\_\_\_\_ application.☐ A verified statement to establish small entity status under 37 C.F.R. 1.27.☒ The filing fee has been calculated as shown below:

(COL. 1) (COL. 2) SMALL ENTITY LARGE ENTITY

For:	No. Filed	No. Extra	RATE	FEE	RATE	FEE
BASIC FEE	-----	-----	----	\$385.00	----	\$770.00
TOTAL CLAIMS	21-20=	* 1	x11	\$	x22	\$ 22.00
INDEP CLAIMS	3-3=	* 0	x40	\$	x80	\$ -0-
MULTIPLE DEPENDENT CLAIM PRESENTED			+130	\$	+260	\$
* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.			TOTAL	\$	TOTAL	\$792.00

Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$ 792.00 to cover the filing fee is enclosed.☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.☒ Any additional filing fees required under 37 C.F.R. 1.16.☒ Any patent application processing fees under 37 C.F.R. 1.17.

The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. \_\_\_\_\_. A duplicate copy of this sheet is enclosed.


☐ Any patent application processing fees under 37 C.F.R. 1.17.☐ The issue fee set in 37 C.F.R. 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).☐ Any filing fees under 37 C.F.R. 1.16 for the presentation of extra claims.  
David D. Murray  
Registration No. 28,647

Table 1. Demographic characteristics of the study population	
Age (years)	65.5 ± 1.2
Gender (male/female)	10/10
Education (years)	12.5 ± 0.5
Occupation	Retired
Marital status	Married
Smoking status	Non-smoker
Alcohol consumption	Non-drinker
Comorbidities	Hypertension, Diabetes, Hyperlipidemia
Medications	Antihypertensives, Antidiabetics, Lipid-lowering agents
Study duration (months)	12
Follow-up compliance (%)	95
Dropouts	2
Final sample size	18

Laura J Parker  
(signature)

Brinks Hofer Gilson  
& Lione  
1130 Edison Plaza  
Toledo, Ohio 43604-1537  
(419) 244-6578

TITLE

DEPTH MEDIA IN-TANK FUEL FILTER WITH  
EXTRUDED MESH SHELL

BACKGROUND OF THE INVENTION

5

The invention relates generally to in-tank fuel filters and more specifically to an in-tank fuel filter having layers of spun bonded and melt blown filtration media and an outer shell of extruded mesh.

10

The modular assembly approach to motor vehicle manufacture increasingly demanded and practiced by automobile manufacturers has effected the design and componentry of motor vehicles in numerous ways. With regard to fuel systems, and particularly the fuel supply and filtration components, fuel filters have changed from a single, in-line assembly typically disposed under the hood and adjacent the carburetor, such as disclosed in United States Patent No. 4,036,758, to modular designs wherein a filter, fuel pump and fuel level sensor constitute an assembly which is disposed within and secured to the fuel tank. Such an in-tank filter is described in United States Patent No. 4,961,850.

15

20

25

Typically, such in-tank filters comprise a single layer of a woven nylon, polyester or acetal fabric which is folded and sealed by heat, radio frequency or ultrasonic energy along its edges. In order to improve small particulate filtration capability, the exterior woven fabric layer may be supplemented by an interior non-woven layer having finer pores which provide improved small particulate filtration capability. Given the comparative pore sizes of the outer and inner layers and the particulate filtration capability required of such filters, the exterior layer, in fact,

30

35

provides little from the standpoint of filtration. Rather, it is present primarily to provide a suitably durable protective covering for the non-woven interior layers.

5       Such protection is also necessary because such in-tank filters are disposed either on the end of a suction tube or directly at the inlet of an in-tank fuel pump. In order to achieve the maximum withdrawal  
10 of fuel from the tank, the filter is positioned, and in some installations pressed, against the bottom surface of the fuel tank. In this condition, the lower surface of the fuel filter is subjected to abrasive action due to the small though inevitable relative movement  
15 between the filter and the bottom surface of the fuel tank.

      The present invention addresses problems associated with this type of filter installation, achieves the small particulate filtration capability of  
20 melt blown filtration media and exhibits excellent abrasion resistance due to the incorporation of an extruded mesh outer shell.

#### 25       SUMMARY OF THE INVENTION

      An in-tank fuel filter includes a body having upper and lower panels each comprising an outer shell or layer of extruded mesh, one or more layers of spun  
30 bonded and melt blown filtration media and a fitting for mounting the filter to an in-tank fuel pump inlet. The outer layer of the panel is extruded mesh material that has the general appearance of a woven fabric but includes connections at every filament intersection.  
35 This outer layer protects the finer, inner filtration layers which include a first layer of spun bonded

material, a layer of melt blown filtration media defining smaller pore sizes and a second layer of spun bonded material. The spun bonded material acts as a relatively coarse filter of particulates and the one or more layers of melt blown material filter finer particulates thereby providing graduated or staged, i.e., depth media, filtration.

The mounting fitting is made of a fuel compatible material and may either be a multiple part device or be in-situ molded on one of the filter panels. Separating ribs or a stuffer may be disposed in the interior of the filter to prevent its collapse and improve fuel withdrawal through the mounting fitting.

Three alternate embodiments of the filter body panels include the outer layer of extruded mesh and various combinations of spun bonded and melt blown filtration materials.

It is thus an object of the present invention to provide an in-tank fuel filter having an outer shell of extruded mesh.

It is a further object of the present invention to provide an in-tank fuel filter having one or more layers of non-woven filtration media.

It is a still further object of the present invention to provide an in-tank fuel filter having an outer layer of extruded mesh and one or more inner layers of spun bonded and melt blown filtration media.

It is a still further object of the present invention to provide an in-tank fuel filter which exhibits excellent abrasion resistance when situated in contact with the bottom of a fuel tank.

It is a still further object of the present invention to provide an in-tank fuel filter which exhibits excellent dimensional and shape stability due

to the outer shell of extruded mesh having welds at every filament intersection.

It is a still further object of the present invention to provide an in-tank fuel filter having a plurality of non-woven layers of filtration media with the layers arranged to provide staged or graduated filtration.

It is a still further object of the present invention to provide an in-tank fuel filter having a multi-part or in-situ molded fitting and a spacer or stuffer assembled therewith.

Further objects and advantages of the present invention will become apparent by reference to the following description of the preferred embodiment and appended drawings wherein like reference numbers refer to the same feature, element or component.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagrammatic, side elevational view, with portions broken away, of a vehicle fuel tank including an in-tank fuel filter according to the present invention;

Figure 2 is a perspective view of an in-tank fuel filter having layers of extruded mesh and non-woven filtration media according to the present invention;

Figure 3 is a fragmentary, enlarged, cross sectional view of the upper and lower panels of an in-tank fuel filter according to the present invention taken along line 3-3 of Figure 2;

Figure 4 is a enlarged, fragmentary, perspective view of the outer shell or layer of extruded mesh of an in-tank fuel filter according to the present invention;

Figure 5 is a greatly enlarged, fragmentary, sectional view of the extruded mesh outer shell of an in-tank fuel filter according to the present invention taken along line 5-5 of Figure 4;

Figure 6 is a fragmentary, enlarged, cross sectional view of the outer shell and layers of filtration media of one panel of a first alternate embodiment of an in-tank fuel filter according to the present invention;

Figure 7 is a fragmentary, enlarged, cross sectional view of the outer shell and layers of filtration media of one panel of a second alternate embodiment of an in-tank fuel filter according to the present invention; and

Figure 8 is a fragmentary, enlarged, cross sectional view of the outer shell and layer of filtration media of one panel of a third alternate embodiment of an in-tank fuel filter according to the present invention.

#### DESCRIPTION OF THE PREFERRED AND ALTERNATE EMBODIMENTS

Referring now to Figure 1, a typical vehicle fuel tank is illustrated and generally designated by the reference numeral 10. The vehicle fuel tank 10 is typically fabricated of formed, welded metal, blow molded plastic or a similar substantially rigid and fuel resistant material. The vehicle fuel tank 10 includes an inlet or filler tube 12 which receives fuel such as gasoline, gasohol, diesel fuel or other, alternative fuel from a source exterior to the vehicle (not illustrated) and directs it to the interior of the vehicle fuel tank 10 as will be readily understood. The vehicle fuel tank 10 also typically includes an

electric fuel pump module 14 which is sealingly mounted within an opening 16 in the vehicle fuel tank 10 and may be secured thereto by a plurality of threaded fasteners 18 or other securement means. The electric fuel pump module 14 preferably includes an electric fuel pump 20 and may include a fuel level sensor assembly (not illustrated). The fuel pump 20 provides fuel under pressure to a fuel outlet or supply line 22 which communicates with the engine (not illustrated) of the vehicle. An electrical cable 24 having one or two conductors provides electrical energy to the fuel pump 20 in accordance with conventional practice.

Referring now to Figures 1 and 2, the electric fuel pump module 14 also includes a depending, preferably hollow cylindrical suction or inlet fitting 26 which defines an inlet opening in fluid communication with the suction side of the fuel pump 20. The cylindrical inlet fitting 26 receives and retains an in-tank fuel filter assembly 30 according to the present invention.

The in-tank fuel filter assembly 30 includes a body 32 comprising a preferably folded swatch of multi-layer or composite filtration media having a single elongate fold line 34 and a partial peripheral seam or seal 36. The body 32 is preferably rectangular and may be formed of a single swatch of composite filtration media folded along the fold line 34. Three of the edges may include an edge or peripheral seam or seal 36. Alternatively, the body 32 may define a triangular, other polygonal shape (e.g., square, pentagonal or hexagonal) having N edges or an irregular shape with at least one straight edge, in which case one edge is folded and the N-1 remaining edges, or non-folded regions, are closed by a seam or seal 36. As a



further alternative, the body 32 may comprise a pair of equal size filtration media swatches of any convenient or desired regular shape such as round or oval or irregular shape which may be sealed together entirely around their aligned, adjacent peripheries along an edge seal 36. In any case, the body 32 forms an interior space 38 which, but for an outlet fitting, is closed and comprises a first or upper composite panel 40A and a second or lower composite panel 40B.

Generally centrally disposed on the first or upper composite panel 40A of the fuel filter assembly 30 is an outlet fitting 42 which is preferably circular and includes a spring metal mounting and retaining washer 46 having a plurality of circumferentially arranged radial inwardly extending spring tabs 48. The mounting and retaining washer 46 removably or semi-permanently secures the fuel filter assembly 30 to the inlet fitting 26 of the fuel pump 20. Alternatively, spring clips, mounting ears, latches or retaining tabs formed on the outlet fitting 42 may cooperate with complementarily configured features on the inlet fitting 26 to secure the fuel filter 30 thereto.

The outlet fitting 42 is preferably fabricated of nylon or other fuel tolerant and impervious material such as acetal or polyester and is preferably molded in-situ on the upper composite panel 40A of the fuel filter assembly 30. The outlet fitting 42 may also be assembled from two or more interengageable parts. Also preferably molded in-situ to the second or lower composite panel 40B of the fuel filter assembly 30 are one or more runners, ribs or separators 50 having sufficient internal height above the interior (upper) surface of the lower panel 40B to maintain separation of the interior surfaces of the upper and lower

composite panels 40A and 40B of the filter assembly 30 such that the interior space 38 is maintained and fuel flow therebetween and into the outlet fitting 42 is facilitated. Alternatively, of course, the runners, ribs or separators 50 may be in-situ molded, either with or independently of the outlet fitting 42, on the first or upper composite panel 40A to achieve such separation and facilitate fuel flow.

In Figure 3, a cross sectional view of the upper panel 40A and the lower composite panel 40B of the filter assembly 30 is presented. It should be understood that while the composite panels 40A and 40B are identical, they are oriented oppositely or in mirror image, i.e., the top (outside) layer of the upper composite panel 40A is the same as the bottom (outside) layer of the lower composite panel 40B and so on. Thus, while only the upper composite panel 40A of the preferred and alternate embodiments will be specifically described herein, it should be appreciated that, with the foregoing qualification, the description of one applies equally to the other. Furthermore, both the upper and lower composite panels 40A and 40B are preferably sonically point-bonded to provide spaced apart regions of connected or coupled filaments evidenced by the compressed regions 52 illustrated in Figures 2 and 3.

The upper composite panel 40A preferably includes at least four distinct layers of material. The outer, that is, upper, exterior shell or layer 60 is a relatively coarse extruded mesh of any suitable fuel tolerant and impervious material, e.g. nylon, polyester, acetal or Teflon. Teflon is a registered trademark of the E. I. DuPont de Nemours Co. The relative coarseness means that the exterior layer 60

contributes relatively little to the fuel filtration process except on the largest scale. Rather, the extruded mesh of the exterior layer 60 provides an exceptionally stable and abrasion resistant outer covering for the fuel filter assembly 30.

Such characteristics are best understood with reference to Figure 4 and 5. Although the mesh of the exterior layer 60 is extruded, it has the appearance of a woven fabric with warp filaments 62, woof filaments 64 and uniform interstices 66. In fact, the uniformity of the interstices 66 is extraordinarily high because the warp filaments 62 and woof filaments 64 are connected or integrally formed at each intersection 68 as shown in Figure 5. This results in the exterior shell or layer 60 of extruded mesh having exceptional dimensional stability due its resistance to pantographing and ruggedness due to the strength of the mesh and its excellent abrasion resistance. As used here, the term pantographing refers to the tendency or ability of swatches of woven material to distort and collapse like a pantograph when sides of the swatch are pulled or pushed. The interstices 66 in the extruded mesh exterior layer 60 are diamond shaped and preferably about 500 microns by 900 microns. This opening size is not critical, however, and the size may readily be varied by  $\pm 25$  percent or more.

Turning again to Figure 3, a pair of fine, non-woven filtration layers 70 are preferably spun bonded nylon filaments but may be spun bonded polyester, acetal, Teflon or other stable, fuel impervious material. As utilized herein, the terms spun bonded filaments and spun bonded filtration media refer to that class of non-woven materials wherein the filaments

are cooled by the application of cold air immediately upon forming to stop attenuation thereof.

Typically, the diameters of such spun bonded filaments will be on the order of 100 microns but may readily range from between 50 and 200 microns. Each layer 70 illustrated in Figure 3 preferably has a nominal uncompressed thickness on the order of .5 millimeters though such thickness may vary from less than about .25 millimeters to up to about 1 millimeter or thicker depending upon production and application variables.

Disposed within the two layers 70 of spun bonded material is a center or intermediate layer 80 of finer, melt blown filaments. As utilized herein, the terms melt blown filaments and melt blown filtration media refer to that class of non-woven materials wherein the filaments are maintained at an elevated temperature by the application of hot air immediately upon forming to encourage attenuation thereof.

Typically, melt blown filaments are on the order of ten times smaller than spun bonded filaments and thus are nominally 10 microns in diameter and may readily be in the range of 5 to 20 microns. The melt blown filaments may also be nylon, polyester, acetal, Teflon or other stable, fuel impervious material. The center or intermediate layer 80 of melt blown filaments preferably has a nominal uncompressed thickness of 1 millimeter but may vary from less than .5 millimeters to 2 millimeters or thicker.

The upper and lower panels 40A and 40B of the preferred embodiment fuel filter assembly 30 thus each include an outer or exterior layer or shell 60 of extruded mesh and two layers 70 of spun bonded material having a first, larger filament size sandwiching an

intermediate layer 80 of melt blown filaments having filament sizes which are approximately one magnitude smaller. The interstitial or pore sizes of the layers 70 and 80 are correspondingly larger and smaller. This graduated pore size has the effect of first filtering out larger particulate matter in the first layer 70 of spun bonded material and then filtering out smaller particulate matter in the center or intermediate layer 80 of melt blown filaments. As noted, due to the relatively large size of the pores or interstices 66 of the extruded mesh outer layer 60, it contributes to the filtration process only on the largest scale. This staged or graduated arrangement of filtration filaments and pore sizes is referred to as depth media and the graduated or staged filtration of particulate matter therethrough is referred to as depth media filtration.

Referring now to Figures 2 and 6, a first alternate embodiment of the preferred embodiment upper composite panel 40A is illustrated and designated by the reference number 140A. It will be appreciated that the first alternate embodiment upper composite panel 140A will be used with a lower composite panel (not illustrated) of the same configuration to form a filter assembly of the same general construction as the fuel filter assembly 30. That is, the first alternate embodiment upper composite panel 140A will be disposed in mirror image adjacent a lower composite panel such that the fuel flow through each panel is in the direction of the arrow in Figure 6. A suitable seal such as the seal 36 is effected about its open edges to form a filter body such as the filter body 32 which includes a suitable outlet fitting such as the outlet fitting 42 disposed thereon.

It should be understood that the second alternate embodiment upper composite panel 240A illustrated in Figure 7 and the third alternate embodiment upper composite panel 340A illustrated in Figure 8 are likewise disposed adjacent a lower composite panel in mirror image to form a fuel filter assembly such as the preferred embodiment fuel filter assembly 30 such that the fuel flow through each upper and lower panel is in the direction of the arrows in Figures 7 and 8.

The first alternate embodiment composite panel 140A includes an exterior layer 60 of extruded mesh as described above which provides good ruggedness and excellent abrasion resistant on the exterior of the filter. The interior, i.e., innermost, layer of the composite panel 140A is a fine, non-woven layer 70' of spun bonded nylon filaments. The layer 70' of spun bonded filaments may also be polyester, acetal, Teflon or other stable, fuel tolerant material. Disposed between the exterior, extruded mesh layer 60 and the interior layer 70' of spun bonded filaments is a center or intermediate layer 80' of finer, melt blown filaments. The sizes of the filaments of the interior layer 70' and the intermediate layer 80' are preferably in the ranges disclosed above with regard to the preferred embodiment upper composite panel 40A. The first alternate embodiment composite panel 140A preferably also includes a plurality of sonically point-bonded, compressed regions 52, one of which is illustrated in Figure 6, which improve the overall strength, integrity and dimensional stability of the composite panel 140A. It will be appreciated that a fuel filter assembly utilizing the first alternate embodiment upper composite panel 140A and a similarly configured lower composite panel provides a somewhat

simpler and therefore less expensive depth media filtration fuel filter which provides substantially the same minimum particulate size filtration capabilities and service life as the preferred embodiment fuel filter assembly 30.

Referring now to Figure 7, the second alternate embodiment upper composite panel 240A is illustrated. The second alternate embodiment upper composite panel 240A is similar to the first alternate embodiment upper composite panel 140A except for the rearrangement or exchange of the interior and intermediate layers 70 and 80 of the panel 140A such that are in the order of the preferred embodiment upper composite panel 40A. That is, the second alternate embodiment upper composite panel 240A includes an exterior extruded shell or layer 60 of extruded mesh of any suitable stable and fuel tolerant material such as nylon, polyester, acetal or Teflon such as described above. A second, intermediate layer 70 includes non-woven spun bonded nylon filaments but may also be filaments of polyester, acetal, Teflon or other stable, fuel tolerant material. Finally, a third interior layer 80 comprises very fine melt blown filaments of nylon or the other materials listed directly above. The sizes of the filaments of the interior layer 70 and the intermediate layer 80 are preferably in the ranges disclosed above with regard to the preferred embodiment upper composite panel 40A. Again, the layers 60, 70 and 80 which comprise the upper composite panel 240A are preferably sonically point-bonded at a plurality of spaced apart compressed regions 52, one of which is illustrated in Figure 7. And again, a filter assembly utilizing the second alternate embodiment upper composite panel 240A and a similarly configured lower composite panel provides

substantially the same minimum particulate filtration capability and service life as the preferred embodiment filter.

Referring now to Figure 8, the third alternate  
embodiment upper composite panel 340A is illustrated.  
The third alternate embodiment upper composite panel  
340A comprehends but two of the layers described above  
with regard to the preferred and alternate embodiments.  
Specifically, the third alternate embodiment upper  
composite panel 340A includes an exterior shell or  
layer 60 of extruded mesh of any suitable stable and  
fuel tolerant material as described above. The second,  
interior layer 80 of the upper composite panel 340A is  
very fine melt blown filaments such as the melt blown  
filaments described above with regard to the preferred  
embodiment upper composite panel 40A. Again, the upper  
composite panel 340A preferably includes a plurality of  
spaced apart point-bonded sites such as the compressed  
regions 52. In the third alternate embodiment upper  
composite panel 340A, the ruggedness and abrasion  
resistance of the extruded panel 60 is coupled to the  
minimum particulate size filtration capability of the  
very fine filaments of the second, interior layer 80.  
Thus, this is the least complex of the various  
embodiments of the filtration panels, although it  
provides the two most necessary features.

The primary benefit of these structures and their  
filtration mode is improved service life in that only  
particulate matter above a certain size is filtered out  
by the first filtration material, for example, the  
layers 70 of spun bonded material, which allows the  
passage of smaller particulate matter which is then  
trapped by the smaller pore size of the layer 80 of  
melt blown material. Such staged or depth media



filtration has the effect of increasing the surface area of the filter as a given region and its surface area function to filter only a specific band or range of particulate sizes. This greatly increases the capacity of the fuel filter assembly 30 to retain particulate matter. In this regard, it should be appreciated that, for example, the layer 80 of melt blown material may itself comprise two or more layers of graduated filament size and thus pore size to achieve depth filtration within this layer. That is, the layer, 80 may include a first distinct layer of melt blown material with filaments having a diameter of 25 microns and, a second, adjacent layer of melt blown filaments having a diameter of 4 microns. In the preferred embodiment upper and lower composite panels 40A and 40B, two layers 70 of spun bonded material fully encapsulate and contain the finer filaments of the intermediate layer 80 of melt blown filaments thereby preventing migration of the exceedingly fine melt blown filaments into the fuel and fuel system of the vehicle. In the first alternate embodiment, the layer 70' of spun bonded filaments contains the finer melt blown filaments of the intermediate layer 80'.

This configuration of graduated filament size provides excellent depth media filtration, wherein the fuel is subjected to finer and finer filament size and thus smaller and smaller pore (interstitial) size. Thus, staged or depth related removal of smaller and smaller particulate matter from the fuel is achieved. As noted above, such staged or depth media filtration greatly improves the particulate retention capacity of the fuel filter 30 and the service life of such filters inasmuch as each region or layer of depth media or graduated filtration material is exposed to



We Claim:

1. An in-tank fuel filter assembly comprising, in combination,

5 a filter body having first and second panels of filtration media defining an edge and providing an interior space between said first and said second panels of filtration media a peripheral seal along at least a portion of said edge,

10 said first and said second panels of filtration media comprising an outer layer of extruded mesh, a pair of layers of spun bonded filtration media and an inner layer of melt blown filtration media disposed between said pair of layers of spun bonded filtration media, and

15 a fitting secured to said first panel of filtration media for providing fluid communication with said interior space.

20 2. The in-tank fuel filter of Claim 1 wherein said filter body is formed of a folded swatch of multi-layer filtration media.

25 3. The in-tank fuel filter of Claim 1 wherein said filtration media is nylon, polyester, acetal or Teflon.

30 4. The in-tank fuel filter of Claim 1 wherein said spun bonded filtration media comprises filaments having diameters in the range of 50 to 200 microns and said melt blown filtration media comprises filaments having diameters in the range of 5 to 20 microns.

35 5. The in-tank fuel filter of Claim 1 wherein said melt blown media is fully contained within said spun bonded media thereby preventing migration of said melt blown media.

6. The in-tank fuel filter of Claim 1 wherein said fitting includes a resilient ring for securing said fuel filter to a fuel inlet.

5 7. The in-tank fuel filter of Claim 1 wherein said first and second panels of filtration media are point-bonded.

8. The in-tank fuel filter of Claim 1 wherein said outer layer of extruded mesh defines extruded  
10 filaments and includes bonds at a plurality of filament intersections.

9. A depth media fuel filter assembly comprising, in combination,

15 a closed body of filtration media having an interior and an exterior, said closed body having a first composite panel of filtration media and a second composite panel of filtration media, each of said composite panels of filtration media comprising an  
20 outer layer of extruded mesh and at least one inner layer of filtration material of one of spun bonded and melt blown filaments, and

an opening in said body for providing fluid communication with the interior of said body.

25 10. The depth media fuel filter assembly of Claim 9 wherein said closed body includes a folded edge and at least two sealed edges.

30 11. The depth media fuel filter assembly of Claim 9 wherein said layers of filtration media are point-bonded.

12. The depth media fuel filter assembly of Claim 9 further including a mounting fitting secured to said filter body about said opening.

35 13. The depth media fuel filter assembly of Claim 12 wherein said mounting fitting includes a spring

retainer for securing said filter assembly to an inlet fitting.

14. The depth media fuel filter assembly of Claim 9 wherein said spun bonded material has a filament size of about 100 microns and said melt blown material has a filament size of about 10 microns.

15. The depth media fuel filter assembly of Claim 9 wherein spun bonded and melt blown material is nylon, polyester, acetal or Teflon.

16. The depth media fuel filter assembly of Claim 9 wherein said extruded mesh includes filaments defining bonded intersections between adjacent filaments.

17. A in-tank fuel filter assembly comprising, in combination,

a body of filtration media having an interior and an exterior, said body having a first panel of filtration media and a second panel of filtration media, each of said panels of filtration media comprising a sandwich of an outer layer of mesh, a region of spun bonded material and a region of melt blown material disposed adjacent said region of spun bonded material,

an opening in said body for providing fluid communication with said interior of said body, and

a fitting secured to said body about said opening for securing said filter assembly to an inlet fitting.

18. The in-tank fuel filter assembly of Claim 17 wherein said closed body includes a folded edge and at least two sealed edges.

19. The in-tank fuel filter assembly of Claim 17 wherein said mesh includes filaments defining intersections and said intersections include a bond between said filaments.



ABSTRACT

An in-tank fuel filter includes a body having  
5 upper and lower panels comprising an outer shell or  
layer of extruded mesh, layers of spun bonded and melt  
blown filtration media and a fitting for mounting the  
filter to an in-tank fuel pump inlet. The outer layer  
10 of the body is extruded mesh material that has the  
general appearance of a woven fabric but includes  
connections at every filament intersection. This outer  
layer protects the finer, inner filtration layers which  
include a first layer of spun bonded material, a layer  
15 of melt blown filtration media defining smaller pore  
sizes and a second layer of spun bonded material. The  
mounting fitting is made of a fuel compatible material  
and may either be a multiple part device or be in-situ  
molded on one of the filter panels. Separating ribs or  
20 a stuffer may be disposed in the interior of the filter  
to prevent its collapse and improve fuel withdrawal  
through the mounting fitting.

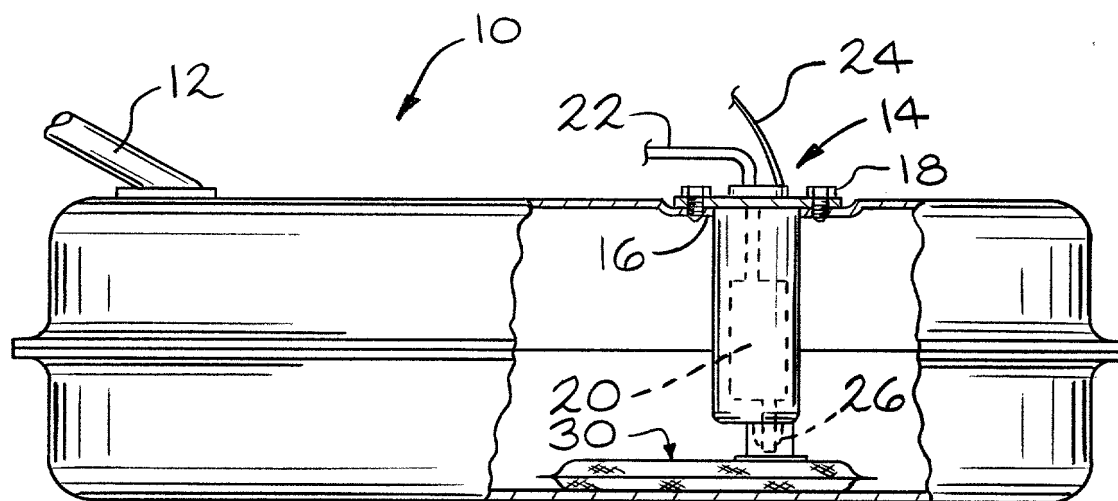


FIG. 1

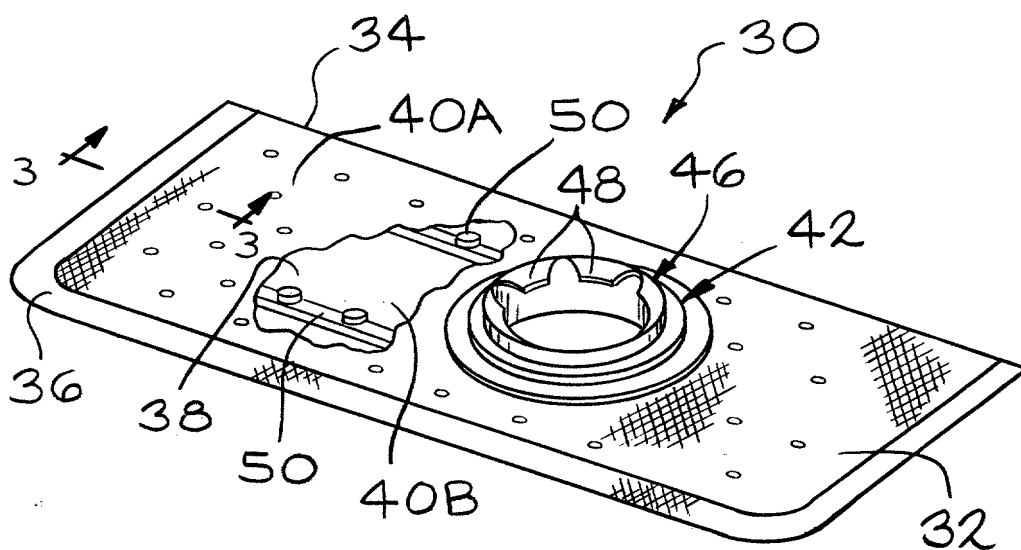


FIG. 2

08855387 051397



FIG. 3

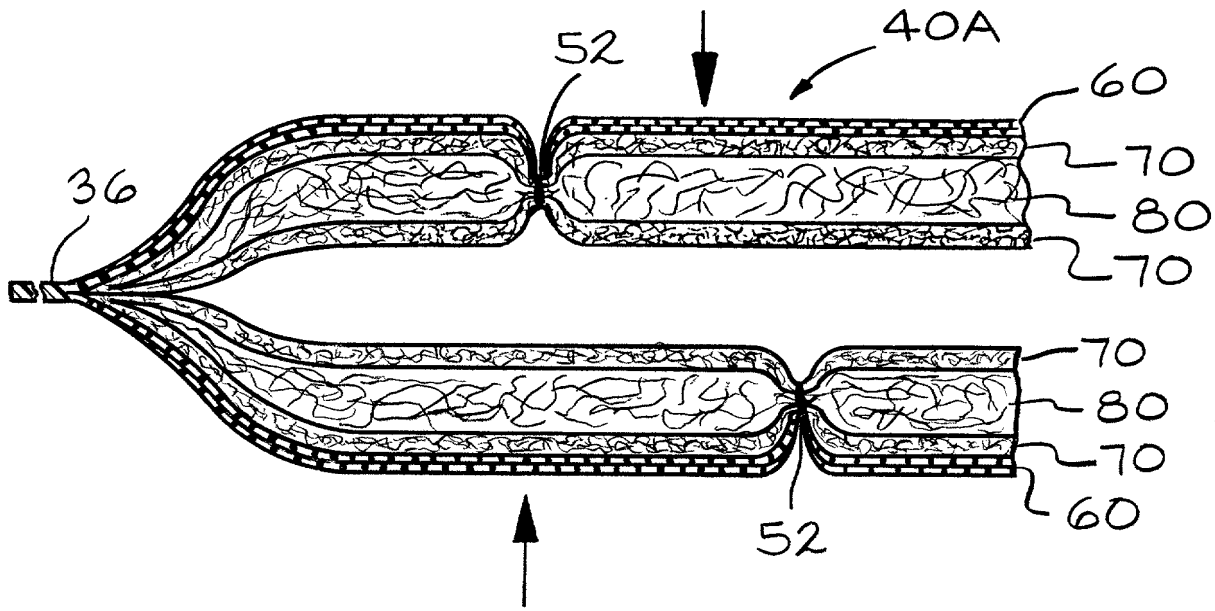


FIG. 4

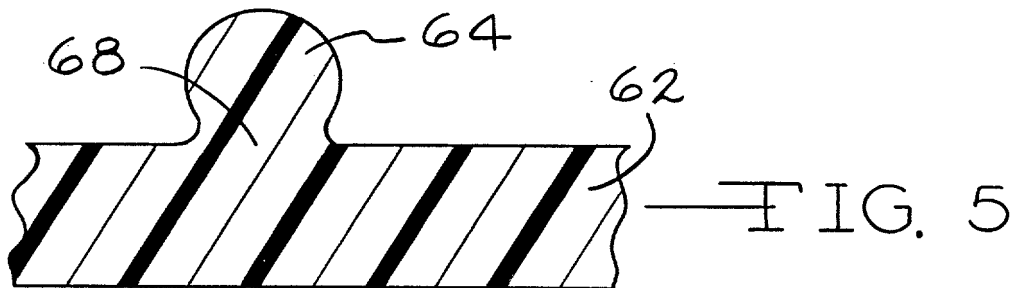
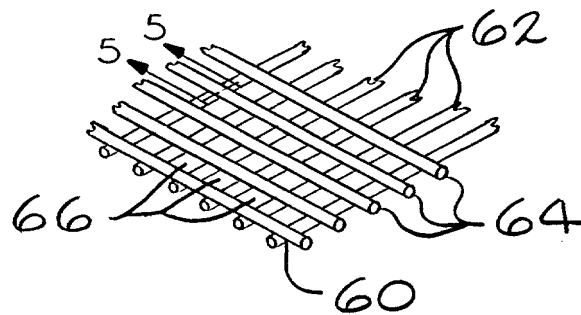


FIG. 5

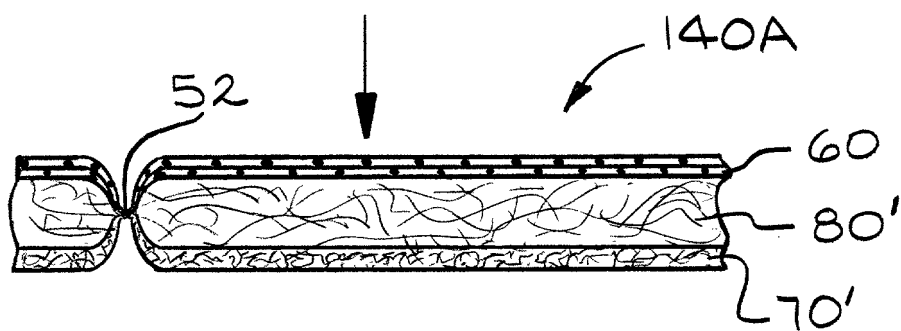


FIG. 6

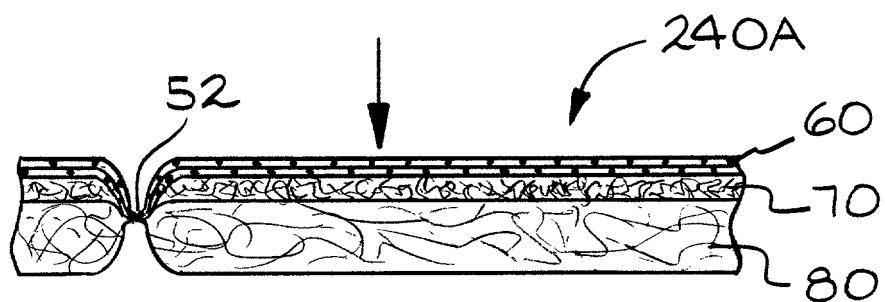


FIG. 7

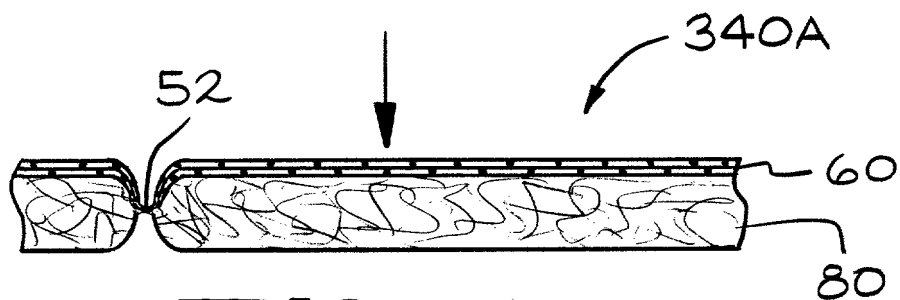


FIG. 8

COMBINED DECLARATION AND POWER OF ATTORNEY Attorney Dkt. 3747-021  
IN ORIGINAL APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name,

I believe that I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DEPTH MEDIA IN-TANK FUEL FILTER WITH EXTRUDED MESH SHELL,  
the specification of which

(check one)   X   is attached hereto.

           was filed on                                      as  
application Serial No.                                       
and was amended on                                     .  
                                    (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>none</u>			<u>  Yes  </u>	<u>  No  </u>
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing Date) (Status)

(patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status)

(patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith with full power of substitution and revocation: Vincent L. Barker, Jr., Reg. No. 21,130; David D. Murray, Reg. No. 28,647, Larry R. Meenan, Reg. No. 33,423; David A. Spenard, Reg. No. 37,449 and Peter J. Rashid, Reg. No. 39,464. Address all telephone calls to David D. Murray at telephone number 419/244-6578. Address all correspondence to BRINKS HOFER GILSON & LIONE, 1130 Edison Plaza, Toledo, Ohio 43604-1537.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor: Hugh G. Chilton

Inventor's  
Signature: *Hugh G. Chilton* Date: 5/12/97

Residence: 2230 Windsong Drive, Findlay, Ohio 45840

Citizenship: U.S.A. Post Office Address: Same as above

Full Name of Second Joint Inventor, if any: William L. Zehnpfennig

Inventor's  
Signature: *William L. Zehnpfennig* Date: 5/12/97

Residence: 119 South Tarr Street, North Baltimore, Ohio 45872

Citizenship: U.S.A. Post Office Address: Same as above